

Cube Type MJPEG Day and Night Wireless IP Camera



ICS303C



IP surveillance



Key Features


- 1/5" CMOS sensor, 640x480 resolution
- 4 IR LED support Day & Night, IR LED with Light sensor control, Hold filter 5M
- IEEE 802.11n Wireless Connection with WPS
- Motion JPEG for Moving Image Display
- Remote Monitoring from Cell phone
- Support Motion Detection function
- Support IR Cut Filter
- Free NVR/ APP Software bundle
- Cloud Service ready

Product Overview

The device is Day and Night Cube Network camera with CMOS sensor. With Motion JPEG video compression, the file size of video stream is extremely reduced, as to optimize the network bandwidth efficiency. It has 3X digital zoom feature for a larger space monitoring. The ICS303C comes with a IR-cut filter and 4 built-in IR illuminators for both day and night applications.

IP Camera Application





ICS303C

Camera

Model Number	ICS303C - MJPEG/ Cube/ IR LED
Hardware System	Network Processor: MIPS base 8196C Flash: 4M RAM: 32M
Image Sensor	Sensor Type :1/5" Color CMOS Sensor (OV7740) Sensor Resolution : 640 x 480 pixel Minimum Illumination : 0 Lux IR LED on
Lens	Focal Length: Board Lens 2.7mm, F2.8 Diagonal viewing angle: 66 degree

Video

Video Image Compression	MJPEG
Video Setting	Auto Exposure Control/ Auto White Balance/ Auto Gain Control
Image Resolution and Frame Rate	VGA (640 x 480) : 30 fps QVGA (320 x 240) : 30 fps QQVGA (160 x 120) : 30 fps

Audio

Audio In	Built-in Omni-directional Microphone Sensitivity: more than -48dB +/- 3dB (5 meters max) FREQ RESPONSE: 50~16000HZ One-way
-----------------	--

Network


Network	10/100 Mbps Ethernet, RJ-45 802.11b/g/n WLAN WPS button Protocols: TCP/IP, UDP, ICMP, DHCP, NTP, DNS, DDNS, SMTP, FTP, HTTP, PPPoE, UPnP and SSL, Bonjour
----------------	---

General

IR Cut Filter Control	Auto Mode (Light Sensor) Day Mode Night Mode
------------------------------	--

Digital Zoom	3X
Security	Multi-level user access with password protection WEP 64/128bit , WPA(2)-PSK(AES/TKIP)
LED and Button	Power Link/Act. Reset Button
Night vision	IR LED with Light sensor control, Range up to 5M
Power	Power Input: DC 5V / 1A Power consumption: Max. 4.5W
Environment	Operating Environments : Temperature: 0 ~ 45 °C Humidity: 20% ~ 85% RH
Dimension	73.9mm (D) x 94.9 mm (W) x 30.5mm (H)
Weight	Net: 100 g
Certification	FCC / CE class B

External View

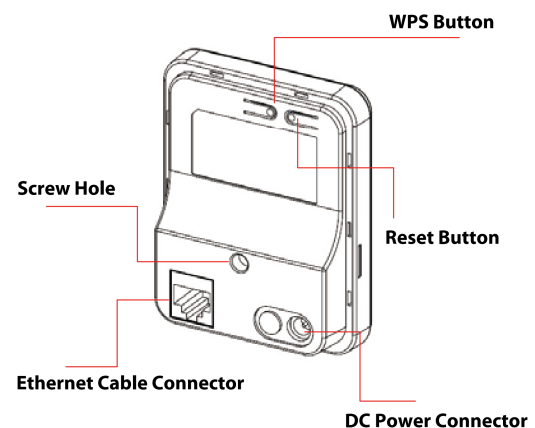

Package Contents

Contents	Network camera Multi-language Quick Installation Guide CD-ROM (Utility and User's Guide) Cat.5 Ethernet cable Power adapter 5V/ 1A Stand
-----------------	---

Distributed by:

IPUX

<http://www.ipux.net>

Address: No.753, Chungcheng RD., Shulin DIST., New Taipei City, Taiwan
Phone: 886-2-2689-3781 Fax: 886-2-2689-3846

©2012 IPUX. All other company names and products are trademarks or registered trademarks of their respective companies. We reserve the right to introduce modifications without notice.